



DOT/TC STAMPING LAYOUT

(NOT TO SCALE)
CHARACTER HEIGHT:
1/4"

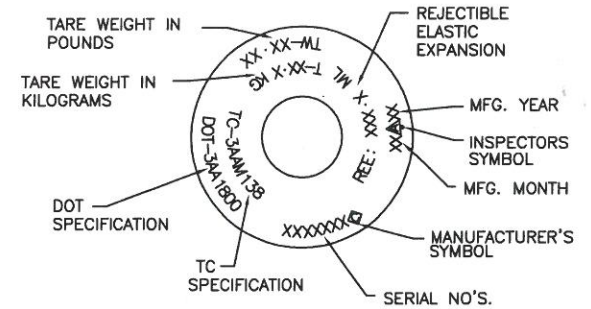

DOT STAMPING LAYOUT

(NOT TO SCALE)
CHARACTER HEIGHT:
1/4"

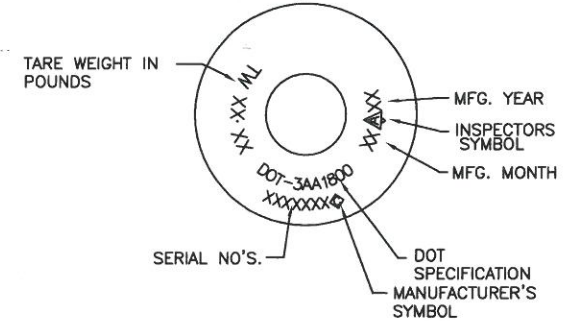

SPECIFICATION	DOT3AA	TC3AAM
WEIGHT	10.5 LBS NOM	4.76 Kg NOM
VOLUME	220 CU IN NOM	3.61 L NOM
SERVICE PRESSURE	1,800 PSIG	138 BARS
TEST PRESSURE	3,000 PSIG	20.70 MP _a

- MATERIAL: 4130
- INTERNAL CLEANING: ALKALINE-STEAM-NITROGEN PURGE
- EXTERNAL FINISH: SHOTBLAST
PAINT PER WORK ORDER
- PACKAGING: PLUG INLET WITH 3/4" (5743) OR, 1/2" (5708) PLASTIC NPT PLUG
CARTON WITH DIVIDERS (5045)

NOTES:

1. NECKRING - IF SPECIFIED ON WORK ORDER, 3 1/8-11 NS CAP THREAD X 1 3/8 BORE X 1 5/8 HEIGH, UNEMBOSSED NECKRING PART NUMBER, (4001).
2. CAP - IF SPECIFIED ON WORK ORDER, 3 1/8-11 NS THREAD PART NUMBER, (820-0001F).

**CONFIDENTIAL
DO NOT DUPLICATE**

**NON-CONTROLLED DOCUMENT
QA/PC DEPARTMENT
REFERENCE ONLY**

14	REV. LOGO	DLH	10/6/10
REV	DESCRIPTION	BY	DATE

UNITS INCHES (mm)		HUNTSVILLE FACILITY 521 GREEN COVE ROAD HUNTSVILLE, AL 35893 USA	
		TOLERANCES (EXCEPT NOTED) DECIMAL ± .01	TITLE 5 LB CO ₂ DRAWN CYLINDER
DRWN. D. HARRIS	APPD. 10/6/10	DATE 12/7/95	DRAWING NUMBER 3740513-50
SCALE NONE	ANGULAR ± 1 DEG		