

SPECIFICATION	DOT3AA	TC3AAM
WEIGHT	10.5 LBS NOM	4.76 Kg NOM
VOLUME	220 CU IN NOM	3.61 L NOM
SERVICE PRESSURE	1,800 PSIG	138 BARS
TEST PRESSURE	3,000 PSIG	20.70 MPa


- MATERIAL: 4130
- INTERNAL CLEANING: ALKALINE-STEAM-NITROGEN PURGE
- EXTERNAL FINISH: SHOTBLAST
PAINT PER WORK ORDER
- PACKAGING: PLUG INLET WITH 3/4" OR, 1/2" PLASTIC NPT PLUG
CARTON WITH DIVIDERS

NOTES:

1. NECKRING - IF SPECIFIED ON WORK ORDER, 3 1/8-11 NS CAP THREAD X 1 3/8 BORE X 1 5/8 HEIGH, UNEMBOSSED NECKRING
2. CAP - IF SPECIFIED ON WORK ORDER, 3 1/8-11 NS THREAD


DOT/TC STAMPING LAYOUT

CHARACTER HEIGHT: 1/4" ALL

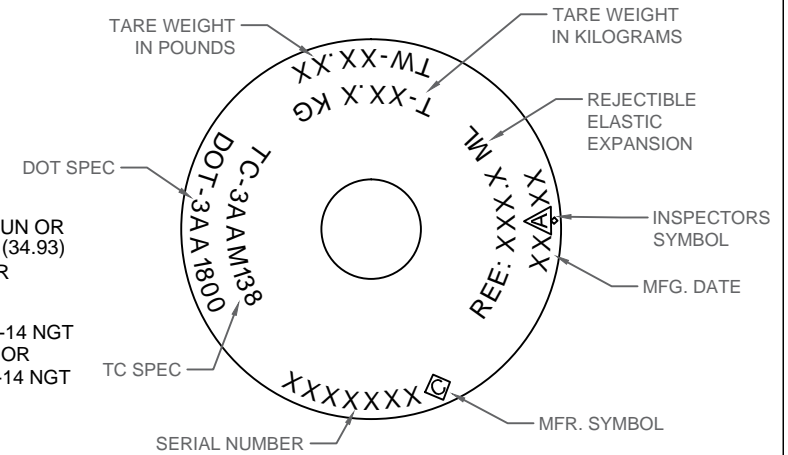

DOT STAMPING LAYOUT

CHARACTER HEIGHT: 1/4" ALL

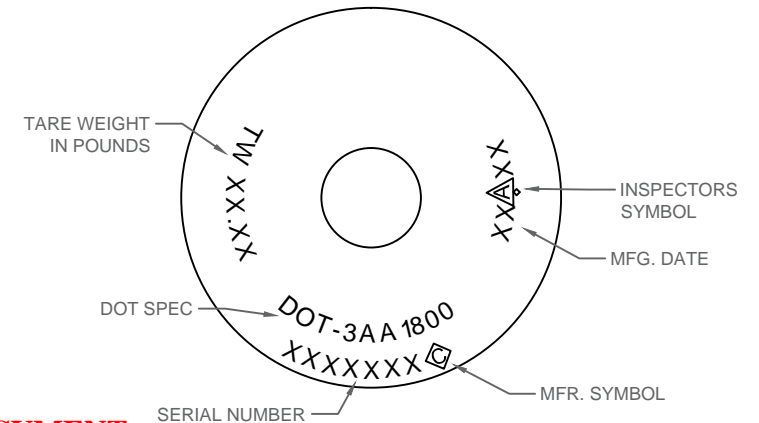

**CONFIDENTIAL
DO NOT DUPLICATE**

**NON-CONTROLLED DOCUMENT
QA/PC DEPARTMENT
REFERENCE ONLY**

15	ADD MIN WALL	DLH	8/29/17
REV	DESCRIPTION	BY	DATE
		HUNTSVILLE FACILITY 521 GREEN COVE ROAD HUNTSVILLE, AL 35803 USA	
		DRWN: D. HARRIS APPD: DLH 8/29/17 APPD: JW 8/29/17 SCALE: NONE	TOLERANCES (EXCEPT NOTED): UNITS INCHES (mm): DATE: 12/7/95