

SPECIFICATION	DOT-3AA	TC-3AAM
WEIGHT	32 LBS NOM	14.5 KG NOM
VOLUME	660 CU IN NOM	10.8 L NOM
SERVICE PRESSURE	2,015 PSIG	154 BAR
TEST PRESSURE	3,360 PSIG	23.16 MPA

**CONFIDENTIAL
DO NOT DUPLICATE**

**NON-CONTROLLED DOCUMENT
QA/PC DEPARTMENT
REFERENCE ONLY**


- MATERIAL: A519 4130
- INTERNAL CLEANING: ALKALINE-STEAM-NITROGEN PURGE
- EXTERNAL FINISH: SHOTBLAST
PAINT PER WORK ORDER
- PACKAGING: PLUG INLET WITH 3/4" NPT PLUG (5743)
RUBBER BAND / PALLETIZE / STRETCH WRAP

NOTES:

1. NECKRING - IF SPECIFIED ON WORK ORDER, 3 1/8-11 NS CAP THREAD X 1 5/8 BORE X 1 7/8 HEIGH, UNEMBOSSED NECKRING PART NUMBER, (4004).
2. CAP - IF SPECIFIED ON WORK ORDER, 3 1/8-11 NS THREAD PART NUMBER, (820-0001F).


DOT/TC STAMPING LAYOUT

CHARACTER HEIGHT: 5/16" ALL

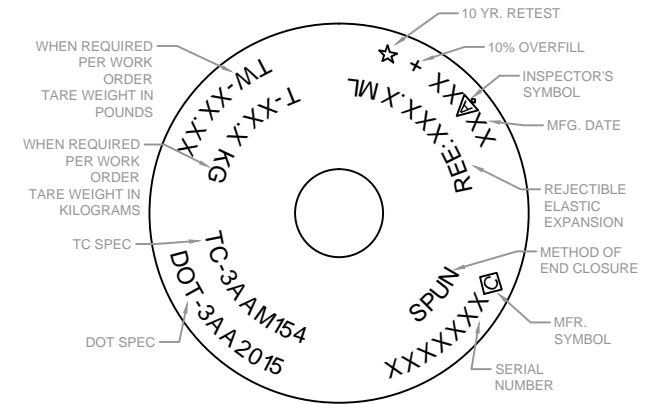

DOT STAMPING LAYOUT

CHARACTER HEIGHT: 5/16" ALL

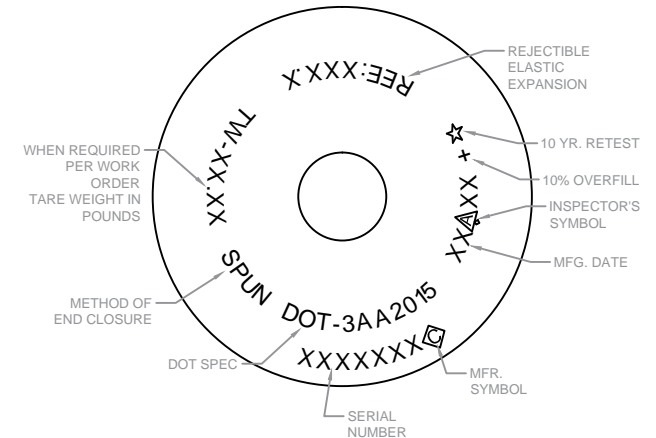

3	REV CYLINDER LENGTH TOLERANCE	DLH	10/18/16
REV	DESCRIPTION	BY	DATE
		HUNTSVILLE FACILITY 521 GREEN COVE ROAD HUNTSVILLE, AL 35803 USA	
		TOLERANCES (EXCEPT NOTED) UNITS INCHES (mm)	TITLE DATE 11/3/10

DRWN:	D. HARRIS
APPD:	DLH 10/18/16
APPD:	JW 10/18/16
SCALE:	NONE