
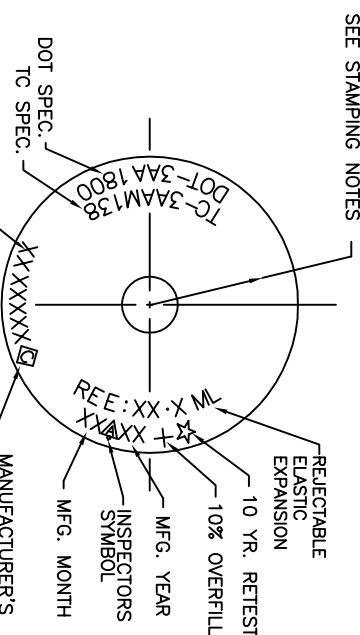
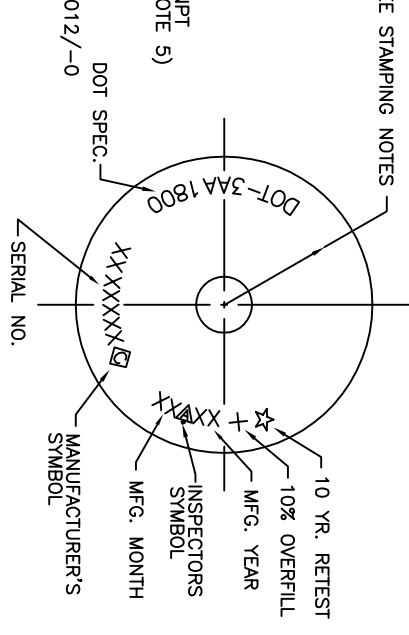


DOT/TC STAMPING LAYOUT:
 NOT TO SCALE
 CHARACTER HEIGHT:
 3/16" ALL

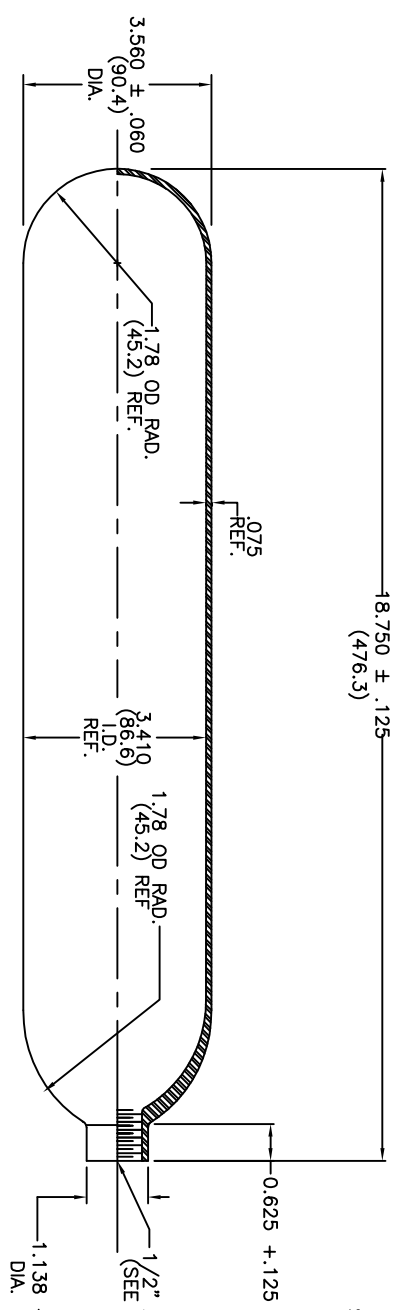

SPECIFICATION	DOT-3AA	TC-3AAM
WEIGHT	4.80 LBS NOM - 5.25 MAX	2.18 LBS NOM - 2.38 KG MAX
CAPACITY	152 CU IN NOM	2.49 L NOM
SERVICE PRESSURE	1,800 PSIG	138 BAR
TEST PRESSURE	3,000 PSIG	20.70 MPa

- NOTES:
1. MATERIAL: 4130
 2. INTERNAL CLEANING: ALKALINE-STEAM-NITROGEN PURGE VAPOR BLAST ZINC PHOSPHATE PER JT-C-490 AND FOR A MIN OF 1000 MG PER SQ FT
 3. EXTERNAL FINISH: SHOTBLAST PAINT PER WORK ORDER
 4. PACKAGING: PLUG INLET WITH 1/2" ANPT PLUG (5708)
 5. THREADS TO CONFORM TO MIL-P-7105

CONFIDENTIAL
DO NOT DUPLICATE
NON-CONTROLLED DOCUMENT
QA/PC DEPARTMENT
REFERENCE ONLY

1	REV. LOGO	DLH	12/1/10
REV	DESCRIPTION	BY	DATE
UNITS	DESCRIPTION		
INCHES (mm)	HUNTSVILLE FACILITY		
TOLERANCES (DEPT. STD)	501 GREEN OAK ROAD HUNTSVILLE, AL 35893 USA		
DECIMAL	TITLE	DRAWING NUMBER	
± .01	147 IN ³ DRAWN CYLINDER, (11 FT ³)	3240318-XX	
ANGULAR	DATE	SCALE	
± 1 DEG	2/2/07	NONE	

DRWN. D. HARRIS
 CHD. 12/1/10
 APPD. 12/1/10
 SCALE NONE